Foldable Bluetooth 5.1+2.4G Wireless Keyboard Mouse With Case

User Manual

Service Email: sales@sz-deying.com

Attention: To use this product correctly, please read the user manual carefully

Product Appearance and Specifications

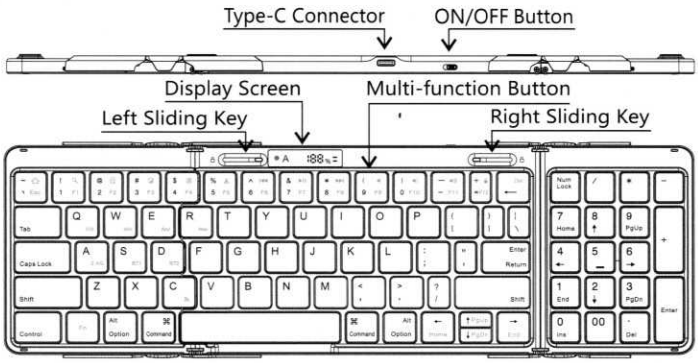

Support System

Windows/ iOS/ Android/ Mac.

Technical Specifications

Keyboard Dimensions: 346.8*114.3*10.5mm (opened)
186*114.3*20mm (folded)

Keyboard Weight: 350g
Working Current: <9mA
Working Distance: 10m
Battery Capacity: 500mAh
Wake-up method: button wake-up

Working Voltage: 3.7V
Standby Current: <1.0mA
Sleep Current: <0.3mA
Sleep Time: 30Minutes

Display Status/ Slider Jam Description

1. Turn on the power, and the keyboard display will light up.
2. When selecting channels, switching channels, and selecting systems, the blue light on the display will light up, and then the display screen will turn off. When pairing, the blue light on the display flashes.
3. When the capital letter is locked, the uppercase A on the display lights up.
4. When Numlk is locked, the indicator light on the lower right side of the display screen lights up.
5. The percentage on the display shows the battery power. When the battery is low, the charging indicator light on the upper right side of the display screen will flash continuously.

6. When the keyboard is in use, the battery level will always be displayed. When the keyboard has no action for 1 minute, the display will turn off and enter a power-saving mood.
7. When charging, the charging indicator light on the upper right side of the display flashes slowly. After it is fully charged, the charging indicator light remains on.
8. Slide the left sliding key to the left end to lock the folding of the left area, and slide it to the right to unlock.
   Slide the right sliding key to the right end to lock the folding of the right area, and slide it to the left to unlock.

Product features

Fn +	iOS/ Mac Android	Fn + shift+	Windows	Fn +	Windows
~ ` Esc	Return to Desk	~ ` Esc	Open the browser	~ ` Esc	Esc
! 1 F1	Search	! 1 F1	Search	! 1 F1	F1
@ 2 F2	Select	@ 2 F2	Select	@ 2 F2	F2
# 3 F3	Copy	# 3 F3	Copy	# 3 F3	F3
$ 4 F4	Stick	$ 4 F4	Stick	$ 4 F4	F4
% 5 F5	Cut	% 5 F5	Cut	% 5 F5	F5
^ 6 F6	Pre-Track	^ 6 F6	Pre-Track	^ 6 F6	F6
& 7 F7	Play/Pause	& 7 F7	Play/Pause	& 7 F7	F7
* 8 F8	Next	* 8 F8	Next	* 8 F8	F8
(9 F9	Mute	(9 F9	Mute	(9 F9	F9
) 0 F10	Volume-	) 0 F10	Volume-	) 0 F10	F10
— _ F11	Volume+	— _ F11	Volume+	— _ F11	F11
+ = F12	Lock	+ = F12	Lock	+ = F12	F12

Pairing Connection Method

1. For 2.4G connection, insert the 2.4G USB receiver into the computer, turn on the keyboard power switch and the keyboard will automatically connect (the default factory setting for the keyboard is 2.4G channel).
2. To connect the first Bluetooth device, press Fn + S, then hold Fn + C key until the signal indicator on the display screen flashes blue. Enter pairing mode, open Bluetooth on the device, find the device named " KM099C ", click to connect, and the keyboard signal indicator will go off after a successful connection.
3. To connect the second Bluetooth device, press Fn + D, then hold Fn + C key until the signal indicator on the display screen flashes blue. Enter pairing mode, open Bluetooth on the device, find the device named " KM099C ", click to connect, and the keyboard signal indicator will go off after a successful connection.
4. Fn + A S D can switch between 2.4G/ Bluetooth 1/ Bluetooth 2 channels.
5. Fn + Q W E R can switch between different systems.

Three system switching language

- Windows: Alt+Shift switch language.
- iOS/Mac: Ctrl+Space key switch language.
- Android: Shift+Space key switch language.

Power Saving Mode

- When there is no action on the keyboard for 1 minute, the keyboard display will go out and light up when pressing any key.
- When the keyboard has not received any action instructions for 30 minutes, it automatically enters the low-power sleep mode. When you need to use it, you only need to press any key on the keyboard and wait ≤4 seconds. The keyboard will wake up and be used normally.
- When the keyboard is not used for a long time, please turn off the power switch to extend the battery life.

iOS Connection instructions



1. Please turn on the keyboard power switch, and the display will light up. Select the channel, press the Fn+ C key, and the blue light will flash. Enter code matching mode.



2.Open the set up button at starting interface and select " Bluetooth " , then searching.

3.You will find the " KM099C " , and click the pairing name to connect.

4.There is a tip for connecting successfully, you can use your keyboard comfortably.

Mac Connection instructions



1. Please turn on the keyboard power switch, and the display will light up. Select the channel, press the Fn+ C key, and the blue light will flash. Enter code matching mode.

2.Open the Mac System Preferences and select " Bluetooth " , then searching.

3.You will find the " KM099C " , and click the pairing name to connect.

4.There is a tip for connecting successfully, you can use your keyboard comfortably.

Windows Connection instructions



1. Please turn on the keyboard power switch, and the display will light up. Select the channel, press the Fn+ C key, and the blue light will flash. Enter code matching mode.



2. Open settings, tum on " Bluetooth ", click Add Bluetooth or other devices.

3. Select " Bluetooth " in the Add Device to search.

4. You will find the " KM099C " , and click the pairing name to connect.

5.There is a tip for connecting successfully, you can use your keyboard comfortably.

Android Connection instructions



1. Please turn on the keyboard power switch, and the display will light up. Select the channel, press the Fn+ C key, and the blue light will flash. Enter code matching mode.



2. Open the tablet PC setting " Bluetooth " into searching and pairing status.

3.You will find the " KM099C " , and click to next step.

4.There is a tip for connecting successfully, you can use your keyboard comfortably.

Remarks : After connecting successfully the next time you don't need match code, just open the Bluetooth keyboard power switch and the tablet PC " Bluetooth ." The BT keyboard will search the device and automatic connects.

Keyboard Maintenance

1, Please keep the keyboard away from liquid or humid environment, saunas, swimming pool, steam room and don' t let the keyboard get wet in the rain.
2, Please don' t expose the keyboard at too high or too low temperature condition.
3, Please don' t put keyboard under sun for a long time.
4, Please don' t put keyboard close to the flame, such as cooking stoves, candles or fireplace.
5, Avoid sharp objects scratching products, timely to recharge products to ensure the normal use.

FAQ

1, The tablet PC can' t connect the BT keyboard?

1) At first check the BT keyboard is into match code state, then open the table PC Bluetooth searching.
2) Checking the BT keyboard Battery is enough, the battery low is also lead to can' t connect, you need charge.

2, The keyboard indication light always flashing when use?

Keyboard indication always flashing when use, is means the keyboard will be no power, please charge the power as soon as possible.

3, The table PC display BT keyboard is disconnect?

The Bluetooth keyboard is not used for a period of time, the device will, automatically enter the sleep state in order to save power Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.

Mouse Instructions

Mouse Technical Parameters

1. 2 Modes: 2.4 G wireless+Bluetooth 5.1.
2. Rechargeable: Built-in rechargeable battery.
3. Accurate tracking: Professional IC positioning accuracy.
4. Silence key: Optional click silence.
5. DPI resolution: 800-1200-1600Three level adjustment design.

Product schematic:

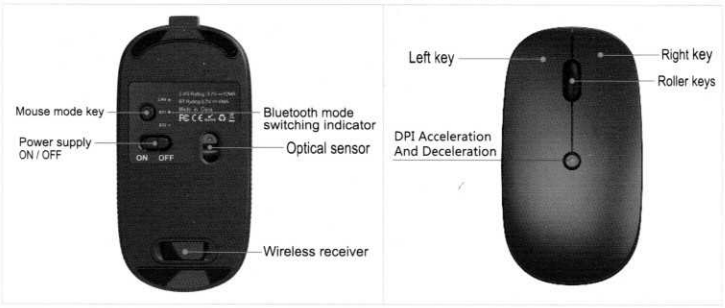

Mouse back view　　Mouse front view

Compatibility

Applicable system:
In Bluetooth mode: Windows(windows XP/ Vista/ 7/ 8/ Server 2003/ 2000/ Win10, etc)
Android (Android4.3 above)
MacOS (macOS 10.10 above is recommended)
In 2.4G mode: suitable for desktop computers, notebook computers, smart TV with USB interface, etc.

Product parameters

2Modes: Bluetooth5.1 + 2.4 G wireless mouse	
Operation Mode: Opto-electronic	Type: 2.4Ghz+BT5.1
Power Type: Rechargeable	Number of keys: 4 keys
Key life: 3 million times	Wireless distance: 10m
Net weight: 65g	Product Size: 110.3*60.1*32.2mm
Interface type: TYPE-C	Battery capacity: 300mAh
Resolution: 800-1200-1600dpi	Rated voltage / current: 3.7V / 12mA

How to use

USB 2.4G mode connection steps:

1. 2.4G connection, insert the 2.4G USB receiver into the computer.
2. turn on the Mouse power switch and the Mouse will automatically connect (the defaultfactory setting for the Mouse is 2.4G channel).

Bluetooth 1 connection steps:

1. Turn on the Bluetooth icon on your computer.
2. Turn on the mouse power switch, press the mode switch 1 times, the second mode light turns green and flashes quickly.
3. You will find the"M099C", and clickthe pairing name to connect.

Bluetooth 2 connection steps:

1. Turn on the Bluetooth icon on your computer.
2. Turn on the mouse power switch, press the mode switch 2 times, the third mode light turns blue Flashing quickly.
3. You will find the"M099C", and clickthe pairing name to connect.

Warranty Card

User information

Company or personage full name

_____

Contact address _____

_____

TEL _____ **Zip** _____

The purchased product name and model NO.

_____

Purchased date _____

This reason due to the product broken and damage is not include on the warranty.
1) Accident, misuse, improper operation, or any unauthorized repair, modified or removed.
2) Improper operation or maintenance, when operation violation of the instructions or connectionun suitability power supply.
3) Or use consumables (such as spare batteries) that are not provided by the company, but applicable laws Except where such restrictions are prohibited.